



VITA 15" PPC

15" Frameless Panel PC with
6th / 7th Gen Intel® Skylake / Kaby Lake-U,
i7 / i5 / i3 / Celeron CPU

Features:

- 15" LCD with capacitive touch screen
- Intel® Skylake / Kaby Lake-U, i7 / i5 / i3 / Celeron CPU
- 1 x DDR4 1866 / 2133 MHz SODIMM, Max. 16GB
- 2 x GbE, 4 x COM, DVI, VGA, 4 x USB, 1 x SIM
- Wide Range 9~36V DC input
- Frameless Panel & Aluminum housing

Specifications :

Motherboard	3I610CW	
CPU	Intel® Skylake / Kaby Lake-U, i7 / i5 / i3 / Celeron CPU	
Chipset	Intel Skylake / Kaby Lake-U SoC	
Memory	1 x DDR4 SODIMM, Max. 16GB	
Storage	mSATA, HDD / SSD*	
Expansion slots	1 x Full-size Mini PCIe (PCIe / USB / mSATA)	
	1x Full-size Mini PCIe (PCIe / USB 3.0 / USB 2.0)	
	1 x SIM	
I/O ports	Network	2 x Intel GbE
	USB	4 x USB 3.0
	Serial ports	4 x RS232 / 422 / 485
	Display	1 x VGA, 1 x DVI
Optional Modules & Function	GPS, Bluetooth, PoE, WiFi, 4G LTE, Isolated COM, battery UPS	
	*SATA Kit, *VESA Mount Kit, *External power adapter CE / FCC	
OS Support	Windows 7, Windows 8.1, Windows 10, Linux	

Mechanical

Dimensions	364.03W x 290.93D x 72.8H mm
Weight	4 kg
Mounting	VESA mount & Stand (optional)

Power

DC input	+9~36V
AC input	External adapter 100 / 240V AC-DC (optional)


LCD Display & Touch

Display Type	15 inch 4:3
Max. Resolution	1024 x 768
Viewing Angle	80(U), 80(D), 80(R), 80(L)
Luminance (cd/m ²)	350
Contrast Ratio	800:1
Touch Type	Projected Capacitive Touch Screen

Environment

Operating Temp. (100 % CPU usage)	-20°C to +50°C with mSATA / SSD
Storage Temp.	-20°C to +70°C
Relative Humidity	95% @ 40°C, non-condensing
IP Rating	Front panel IP65 Compliant

Dimension

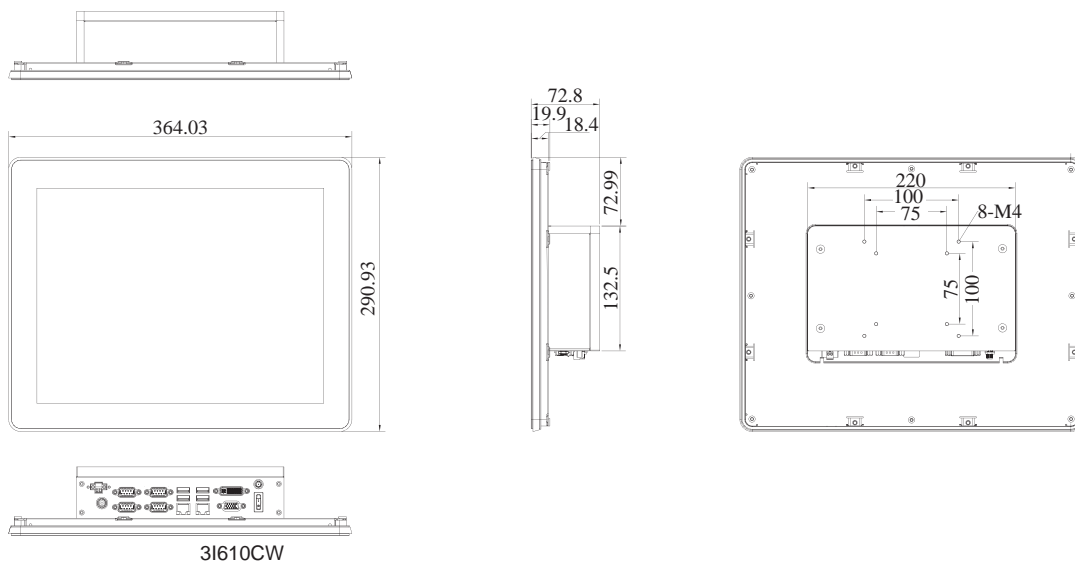

Specification are subject to change without prior notice. ODM / OEM is available.