


MS-98G6

3.5" SBC with Intel® Bay Trail-D/M Series Platform for High-Performance, Low-Power & Fanless Solution

- Industrial Computer
- COM Express Board
- Open Board
- Pico-ITX Board
- 3.5" Board**
- EPIC Board
- PCIM6 Board
- Mini-ITX Board
- Micro-ATX Board
- ATX Board
- Compact-Size Power Ignition Board
- Compact-Size LVDS/DVI
- Compact-Size DC/DC
- Full-Size Mini-PCIe
- Intel® SDM

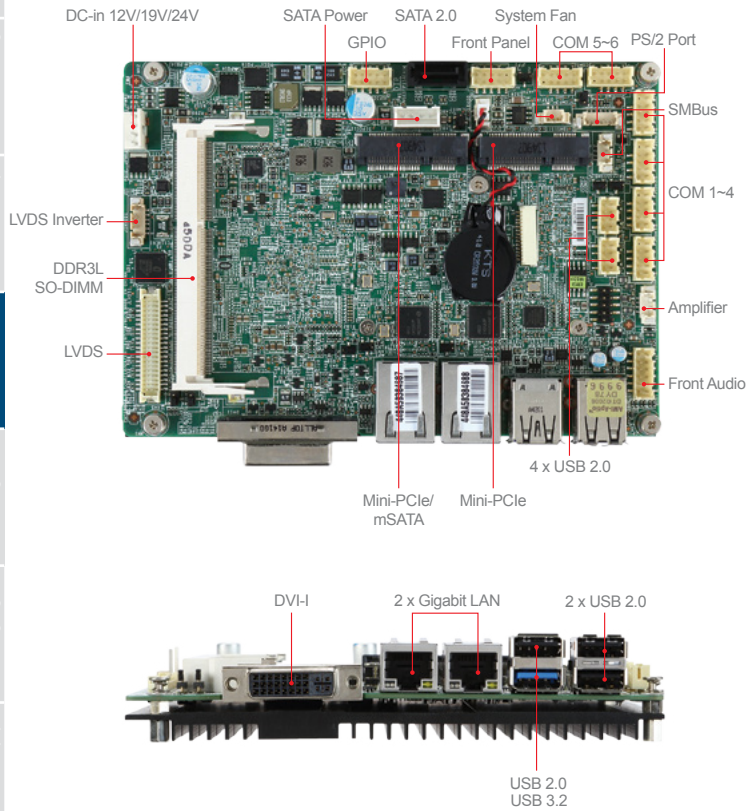

Features

- Intel® Bay Trail-D/M Series SoC
- DDR3L 1333/1600 MHz SODIMM up to 8GB
- Dual independent displays: DVI-I, LVDS
- 2 GbE LAN with RJ-45
- 1 Mini-PCIe (Full size, with mSATA), 1 Mini-PCIe (Full size) Slots
- SATA 2.0 for storage
- USB 3.2 Gen 1, 7 USB 2.0, 6 COM (1 RS-485), GPIO, PS/2, Audio
- DC-IN 12/19/24V

Ordering Information

Part Number	Description
919-98G6-001	MS-98G6 10 Intel Bay Trail D-J1900, DDR3L SO DIMM+DVI-I+LVDS+2*Mini-PCIe+2*LAN+ 1*SA-TA2.0+1*USB3.0+7*USB 2.0+6*COM, DC 12V/19V/24V
919-98G6-002	MS-98G6 10 OPT: A Intel Bay Trail M-N2930,DDR3L SO DIMM+DVI-I+LVDS+2*Mini-PCIe+2*LAN+ 1*SA-TA2.0+1*USB3.0+7*USB 2.0+6*COM, DC 12V/19V/24V

Packing List

Part Number	Description	Quantity
G71-SEDC164-N56	Driver DVD	1
K10-3002145-V03	DC Power Cable, 120mm	1
K14-1009062-V03	COM Port Cable, 250mm	1
K1B-3008034-V03	USB Cable, 150mm	1
K1D-1012064-V03	SATA Cable with Power, 200mm	1

Specifications

Processor	CPU	Intel® Celeron® Processor J1900, QC, 10W Intel® Celeron® Processor N2930, QC, 7.5W
	Frequency	J1900, 2 GHz N2930, 1.83 GHz
	L2 Cache	2MB
	CPU Type	BGA
	Chipset	N/A
	BIOS	AMI
Memory	Technology	Single-channel DDR3L 1333 MHz
	Max. Capacity	Up to 8GB
	Socket	1 x 204-pin SO-DIMM
Display	Controller	Intel® HD Graphics
	Graphic Memory	Depends on CPU
	LVDS	Dual channel 18/24-bit
	DVI	1 (DVI-I)
	Multiple Display	2 independent displays
	Display Interface	LVDS up to 1920 x 1200 @60Hz DVI-I up to 1920 x 1200 @60Hz
Ethernet	Controller	2 x Intel® I210-AT GbE LAN
Audio	Controller	Realtek® ALC887-VD2-CG HD Audio Codec
Super I/O	Controller	Fintek F81866AD-I
H/W Monitor	Watchdog Timer	256-level Watchdog Timer
	Smart Fan	Yes
TPM	Controller	N/A
I/O Interface	USB	7 x USB 2.0 (4 x internal, 3 x rear) 1 x USB 3.2 Gen 1 (rear)
	Serial	6 x COM ports (internal) COM1: RS-232/422/485, 0V/5V/12V COM2-6: RS-232, 0V/5V/12V
	Parallel	N/A
	PS/2	1 (wafer connector)
	GPIO	8-bits (4 x GPI; 4 x GPO), 5V
	Expansion Slot	M.2
Storage	Mini-PCIe	2 x Full-size (one w/mSATA)
	SATA	1 x SATA 2.0
Power Supply	mSATA	1
	DC	DC-in 12/19/24V
Environment	ATX	N/A
	Operating Temperature	-10 ~ 60°C
	Operating Humidity	10 ~ 90%, non-condensing
	Storage Temperature	-20 ~ 80°C
Form Factor	Storage Humidity	10 ~ 90%, non-condensing
	Dimensions	146 x 102mm (3.5")
	Weight	0.31 kg
Certification	EMC	FCC, CE, RCM, VCCI, BSMI
Software Platform	OS Support	Windows 7 (32/64-bit) Windows 8.1 (32/64-bit) Windows 10 (32/64-bit) Linux Fedora 20 (by request) Linux Ubuntu 13.10 (by request)